




## Cylindrical Roller Bearings-VIETNAM C...

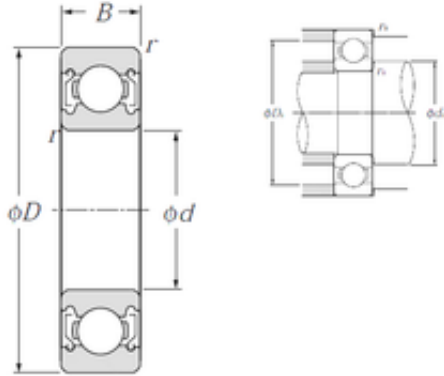

100,000 mm x 150,000 mm x 24,000 mm NTN-SNR 6020ZZ deep groove ball bearings

Bearing No. 6020ZZ

6020ZZ Bearing 2D drawings and 3D CAD models

Size	100x150x24 mm
Bore Diameter	100 mm
Outer Diameter	150 mm
Width	24 mm
d	100 mm
D	150 mm
B	24 mm
C	24 mm
rn	0,5 mm
r min.	1,5 mm
da min.	108 mm
da max	110 mm
Da max.	142 mm
ra max.	1,5 mm
Weight	1,15 Kg
Basic dynamic load rating (C)	60 kN
Basic static load rating (C0)	54 kN
(Grease) Lubrication Speed	4 200 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359004366
Product Group	B00308



## Cylindrical Roller Bearings-VIETNAM C...

Enclosure	2 Metal Shields
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	100MM Bore; 150MM Outside Diameter; 24MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Other Features	Deep Groove   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	2.7778
Outer Race Width	0.945 Inch   24 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outside Diameter	5.906 Inch   150 Millimeter
Bore	3.937 Inch   100 Millimeter
bore diameter:	100 mm
static load capacity:	54000 N
outside diameter:	150 mm



## Cylindrical Roller Bearings-VIETNAM C...

precision rating:	ISO Class 0
overall width:	24 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Shielded
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	24 mm
snap ring included:	Without Snap Ring
outer ring width:	24 mm
internal clearance:	CN
maximum rpm (grease):	4200 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1.5 mm
dynamic load capacity:	60000 N
manufacturer product page:	<a href="#">Click here</a>